



## Cove Light AC HO Graze

Superiorly bright. Extremely efficient. Narrow beams of high-quality light.

Cove Light AC HO Graze is a superiorly bright, extremely efficient and cost effective solution for wall grazing, accent lighting and indirect illumination for interior architectural, retail, hospitality and residential applications. With superior fine binning, every fixture provides high-quality and ultra consistency of linear light. Its compact design allows installation in narrow spaces. Various narrow beam options and 180° (+/- 90°) rotation axis in 10° increment allow flexible and precise aiming. Simple Plug'n'Play cabling and connection makes installation quick and easy and minimize maintenance cost.










**FLEXIBILITY** Highly efficient LEDs with various narrow beam options in dedicated color temperatures ranging from 2700K to 4000K. 180° (+/- 90°) rotation axis in 10° increment allows flexible and precise aiming.

**SIMPLICITY** AC line voltage eliminates the need for external power supplies and enables a daisy-chain topology with extended run lengths up to 50 feet (120V), 100 feet (220V) or up to 135 feet (277V) per power run.

**INNOVATION** Light output of 656-744 lumens per foot and a minimum efficacy of 60 lm/W (2700K) or 68 lm/W for (4000K). Fixtures offer wide 5% - 100% dimming range without flickering.




## Technical Specifications & Options


BEAM ANGLE					
COLOR	 2700K Warm White	 3000K Warm White	 3500K Warm White	 4000K Neutral White	 6500K Cold White <sup>3</sup>
ENVIRONMENT	 Indoor				
TECHNICAL SPECIFICATIONS	CRI: 2700K, 3000K, 3500K, 4000K - 82ra				
	LUMINOUS FLUX <sup>1</sup> : 656 - 744 lm/ft				
	EFFICACY <sup>1</sup> : 60 - 68 lm/W				
	POWER CONSUMPTION: Max. 11W				
	OPERATING TEMPERATURE: -20 to 45°C / -4 to 113°F				
	POWER FACTOR: ≥ 0.9				
	DIMMING <sup>2</sup> : Compatible with and controlled by leading/trailing edge phase-cut dimmers				



### Cove Light AC HO Graze 120/220-240V

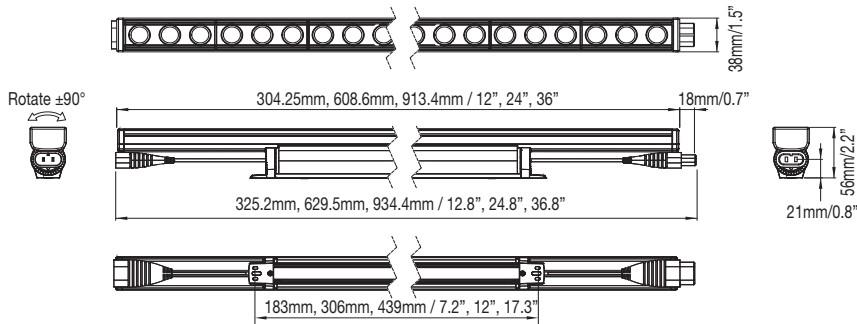

### Cove Light AC HO Graze 277V

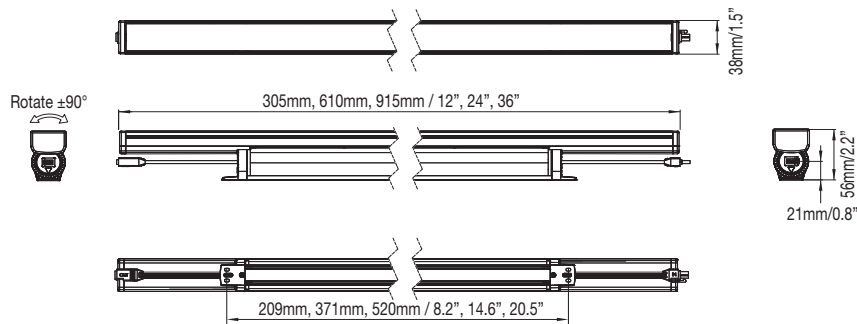

1. Range is respective to color temperature from 2700K - 4000K, see Photometrics page for details.  
 2. Refer to Cove Light AC HO Compatible Dimmer List for specific details.  
 3. Non standard item(s). Please clarify availability with the regional sales office.